




RecScreen®
RAINLESS




CARACTERÍSTICAS DEL TEJIDO / FABRIC CHARACTERISTICS		
Composición / Composition	22% PES - 78% PVC / 22% PES - 78% PVC	
Tipo de tejido / Type of textile	Screen de poliéster panamá semi-impermeable / Basket weave polyester screen highly water resistant	
Ligamento / Pattern	Esterilla 2/2 / Basket weave	
Acabado / Finish	Resinado por una cara / Resin coated one side	
Diámetro del hilo / Yarn diameter	0,30 mm	
Coefficiente de apertura / Openess factor	Tejido base 5% / Base fabric 5%	
Uso / Use	Exterior / Outdoor	
CARACTERÍSTICAS TÉCNICAS / TECHNICAL FEATURES		
Peso / Weight	465 g/m ² ± 5%	UNE-EN 12127
Espesor / Thickness	0,52 mm	UNE-EN ISO 5084
Ancho / Width	150 - 300 cm ±0,5%	
Longitud de pieza / Standard Roll Length	30 m	
Columna de agua / Water Column	≥ 1500 mm	UNE-EN ISO 20811
Resistencia a la Tracción (Urdimbre / Trama) / Tensile Strength (Warp / Weft)	140/140 daN/5 cm ±5%	UNE-EN ISO 13934-1
Resistencia al Desgarro (Urdimbre / Trama) / Tear Strength (Warp / Weft)	7,5/7,5 daN ±10%	UNE-EN ISO 13937-2
Resistencia al frío y al calor / Heat and cold resistance	-30 °C / +70 °C	
Solidez del color a la luz artificial - Xenotest / Colour fastness to artificial light - Xenotest	7-8	UNE-EN ISO 105 B02
Solidez del color a la intemperie artificial - Xenotest / Colour fastness to artificial weathering - Xenotest	4-5	UNE-EN ISO 105 B04
Actividad antibacteriana / Antibacterial activity	99,9% reducción del crecimiento / 99,9% growth reduction	AATCC Test Method 100




RecScreen®
RAINLESS

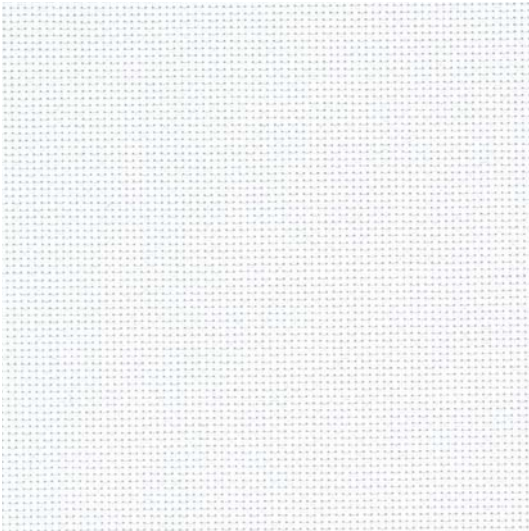

R-000 BLANCO BLANCO / WHITE WHITE

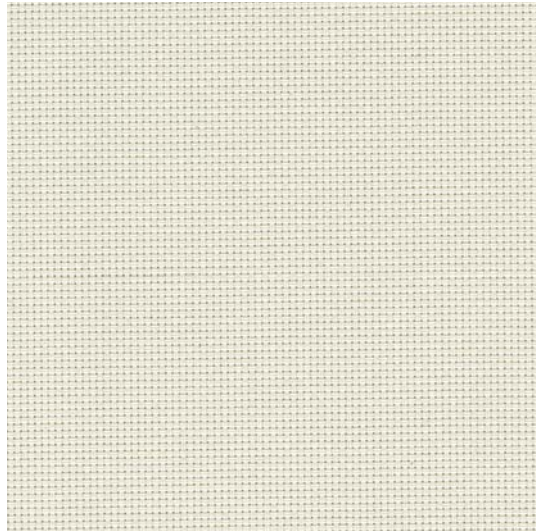

R-100 LINO LINO / LINEN LINEN

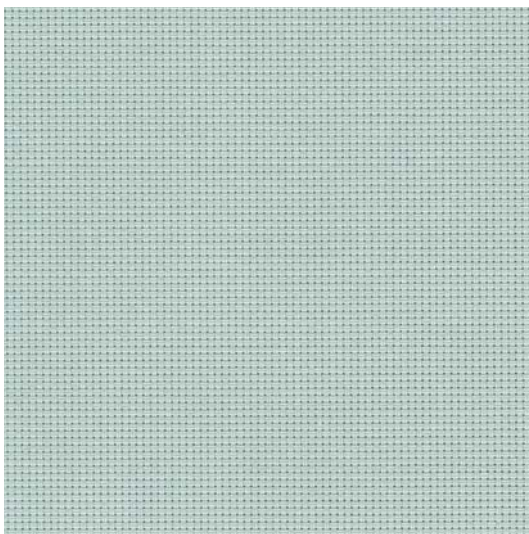

R-400 GRIS PERLA GRIS PERLA / PEARL GRAY PEARL GRAY



R-700 ANTRACITA ANTRACITA / ANTHRACITE ANTHRACITE



RecScreen®



Management System
ISO 9001:2008
www.tuv.com
ID: 910569767