

RecScreen®
Rustic

6%




RECASENS
BCN 1886




RecScreen®

Rustic

6%




Medium opening




Thermal comfort




Decoration




Natural light




Visibility to the outside




Glare control




Privacy

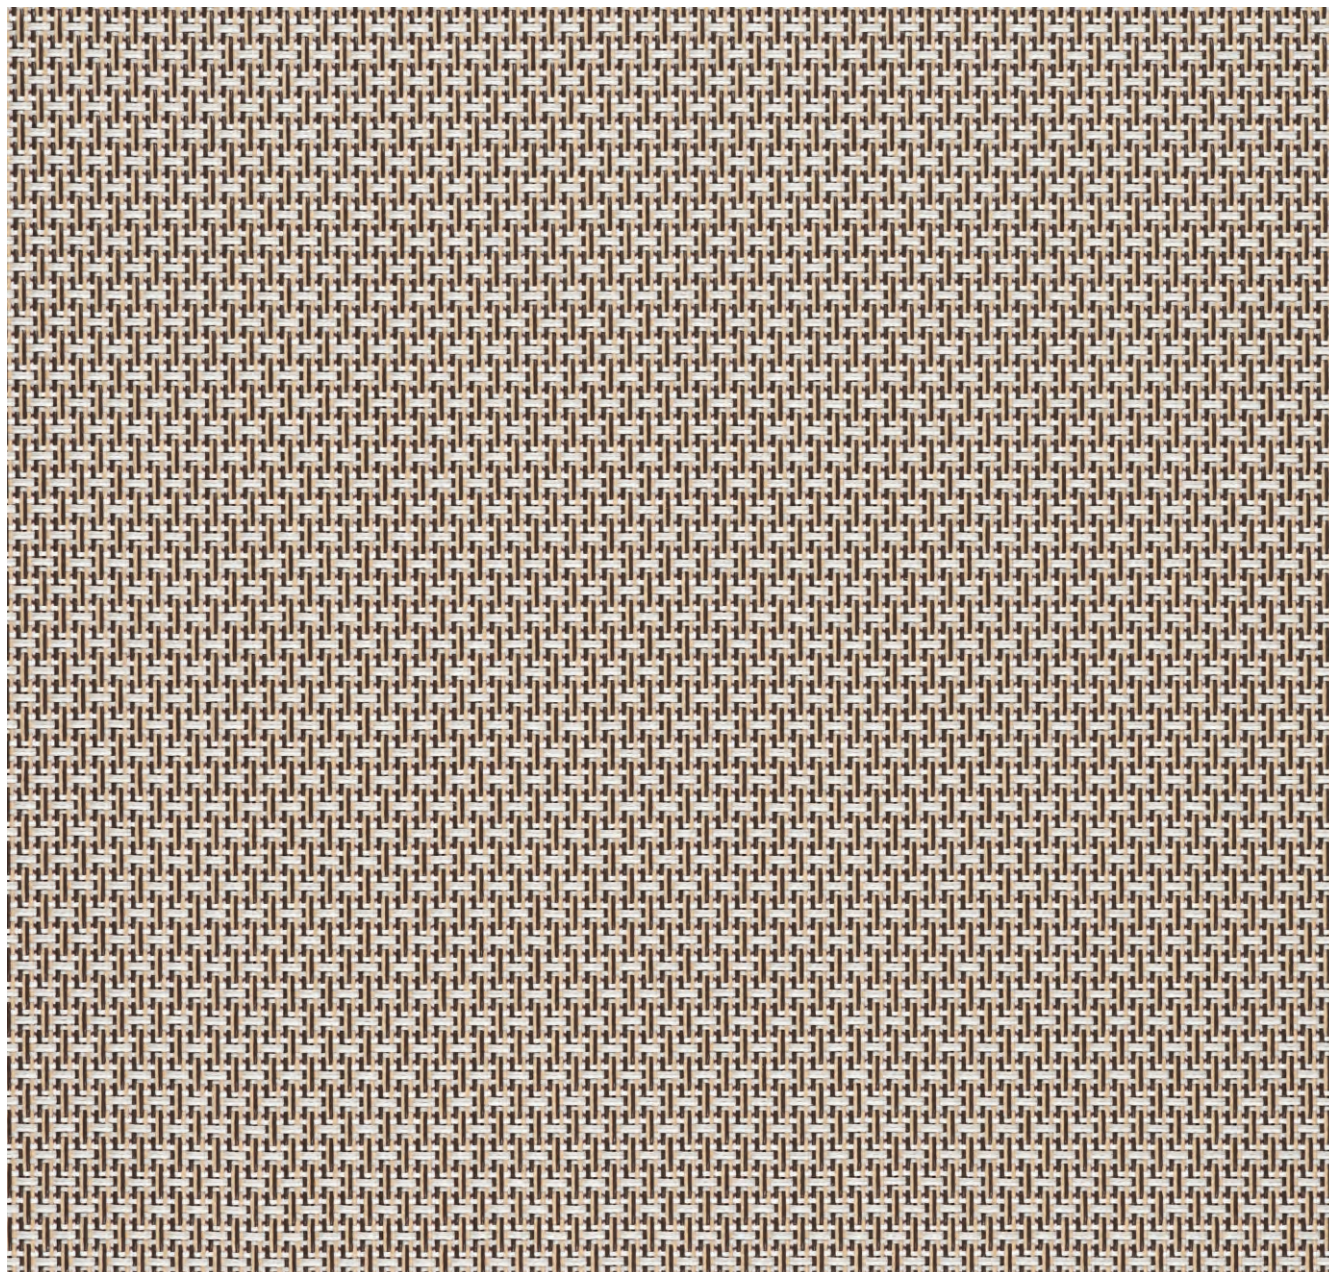


R-100

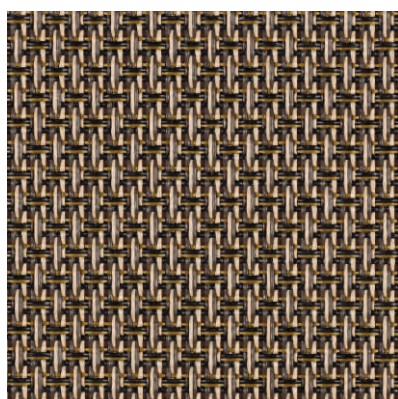

R-101

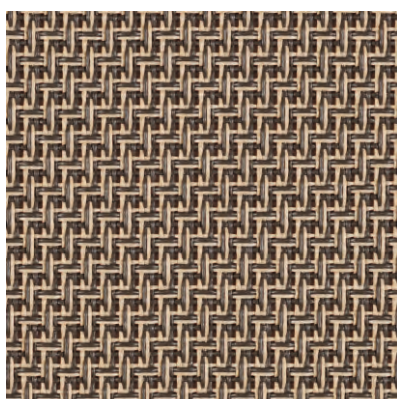

R-102

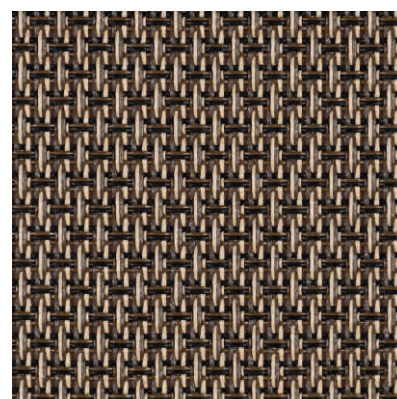


R-103

RECOMMENDED APPLICATIONS - RESIDENTIAL AND TERTIARY

INTERIOR DESIGN AND DECORATION			
INDOOR SOLAR PROTECTION		R	T
Roller blinds or curtains for windows		✓	✓
Roller blinds or curtains for enclosures		✓	✓
Roller blinds for roof windows		✓	✓
Vertical blinds		✓	✓
Japanese panels		✓	✓
Folding awnings		✓	✓
INDOOR FURNITURE		R	T
Office chairs		✓	✓
INDOOR TEXTILE ARCHITECTURE		R	T
Wall coverings		✓	✓
Ceiling coverings		✓	✓
Ceilings with skylights		✓	✓
Separators and screens		✓	✓
Wrappings for isolated elements		✓	✓
Decorative accessories		✓	✓

FACHADAS Y CERRAMIENTOS			
OUTDOOR BLINDS		R	T
Roller blinds for windows or facade awnings		✓	✓
Roller blinds for glazed enclosures		✓	✓
Roller blinds for roof windows		✓	✓
Roller blinds for skylights		✓	✓
AWNINGS		R	T
Vertical or downward awnings		✓	✓
COVERINGS AND ENCLOSURES		R	T
Walls with fabric enclosures		✓	✓
Pergolas with folding awning		✓	✓

OUTDOORS AND TEXTILE ARCHITECTURE			
OUTDOOR SOLAR PROTECTION		R	T
Privacy screens and windbreaks		✓	✓
OUTDOOR FURNITURE		R	T
Deckchairs		✓	✓
Portable sun loungers		✓	✓
Portable armchairs and sofas		✓	✓
Portable seats and chairs		✓	✓
Portable stools		✓	✓

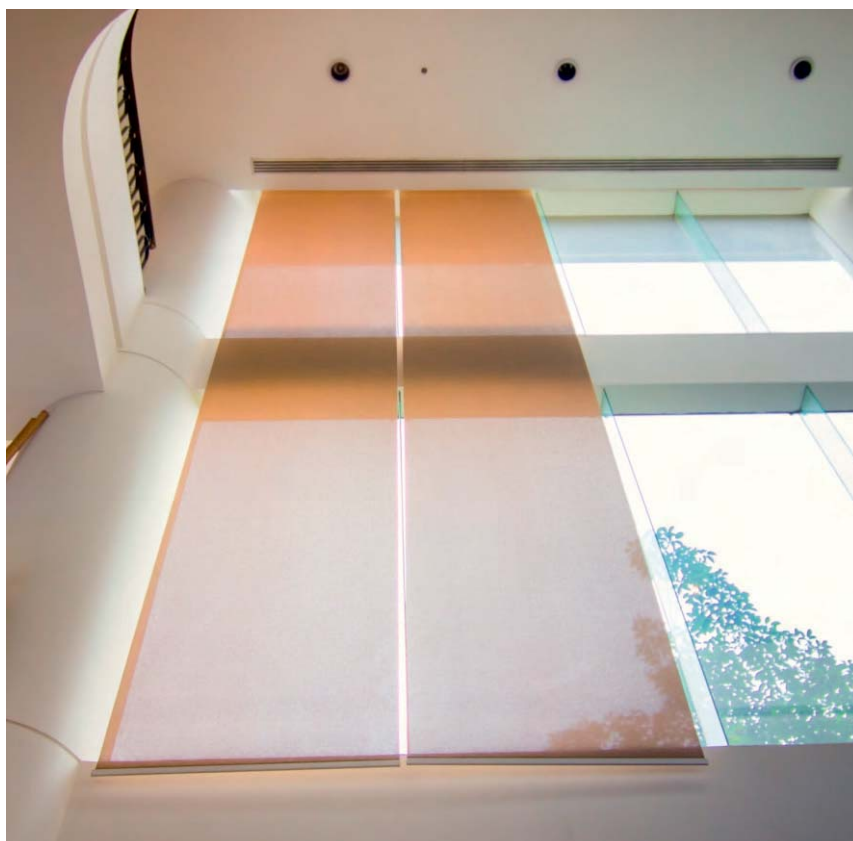

THERMAL FACTORS

RECScreen Rustic 6% openness factor	THERMAL FACTORS											UV
	FABRIC			FABRIC + GLAZING IN PARALLEL POSITION								TUV (τ_{uv})
				Type C Glazing		Type D Glazing		Type C Glazing		Type D Glazing		
REF.	TS ($\tau_{e,B}$)	RS ($\rho_{e,B}$)	AS ($\alpha_{e,B}$)	$g_{tot\ int}$	THERMAL COMFORT CLASS	$g_{tot\ int}$	THERMAL COMFORT CLASS	$g_{tot\ ext}$	THERMAL COMFORT CLASS	$g_{tot\ ext}$	THERMAL COMFORT CLASS	
R-100	12,9	28,0	59,1	0,48	1	0,28	2	0,14	3	0,10	3	8,5
R-101	8,1	13,8	78,1	0,52	0	0,30	2	0,12	3	0,10	4	6,6
R-102	8,1	18,2	73,7	0,51	0	0,29	2	0,12	3	0,09	4	6,0
R-103	9,2	12,9	77,9	0,53	0	0,30	2	0,13	3	0,10	3	7,7

The g_{tot} values are provided for standard glazing types C and D. Please contact us to request the g_{tot} study relating to any other kind of standard glazing or specific glazing for the project.

THERMAL FACTORS

FABRIC

TS ($\tau_{e,B}$): Solar transmittance factor of the fabric in %

RS ($\rho_{e,B}$): Solar reflection factor of the fabric in %

AS ($\alpha_{e,B}$): Solar absorption factor of the fabric in %

FABRIC + GLAZING

$g_{tot\ int}$: Total solar energy transmittance factor.
Glass + fabric in parallel position / Fabric on the inside.

$g_{tot\ ext}$: Total solar energy transmittance factor.
Glass + fabric in parallel position / Fabric on the outside.

TYPES OF GLAZING

Type C Glazing: $g = 0.59$ Total solar energy transmittance factor
 $U = 1.20\ W/(m^2.K)$ Thermal transmittance coefficient
Double glazing (4mm float + 16mm chamber + 4mm float),
with low emission coating in position 3 (outer surface of the
indoor glass), chamber filled with argon.

Type D Glazing: $g = 0.32$ Total solar energy transmittance factor
 $U = 1.10\ W/(m^2.K)$ Thermal transmittance coefficient
Double glazing (4mm float + 16mm chamber + 4mm float),
with low emission coating in position 2 (inner surface of the
outdoor glass), chamber filled with argon.

ULTRAVIOLET FACTORS

TUV (τ_{uv}): Total ultraviolet spectrum transmission factor in %

$$100\% \text{ SOLAR RADIATION} = RS + AS + TS$$

RS SOLAR REFLECTION

Solar energy reflected by the material
towards the outside



TS SOLAR TRANSMISSION

Solar energy that goes through
the material.

AS SOLAR ABSORPTION

Solar energy absorbed by the material.

as solar radiation absorption in the form
of heat outside and inside.

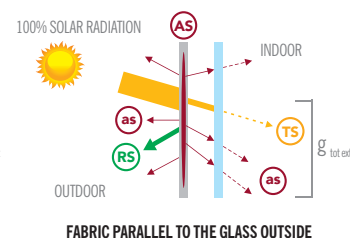

BIM RECASENS & LLAZA


In order to facilitate the work of all those involved in the project, as well as to provide the possibility of performing an energy calculation for our products and adapting it to the specific project data, RECASENS & LLAZA subscribe to the BIM methodology, making their entire range of fabrics covered into BIM aims available to users. The BIM aims of RECASENS & LLAZA are available in Revit® and Archicad® formats, in Spanish and English. At www.bimobject.com/es you will be able to do the following after registering:

- Download products in Revit®, Archicad®, IFC®, etc.
- Download catalogues and manuals
- Request information and advice for your project

bimobject®

VISUAL PROPERTIES

RECSCREEN Rustic 6% openness factor	OPTICAL FACTORS
REF.	TV n-h ($\tau_{v, n-h}$)
R-100	11,2
R-101	7,5
R-102	7,1
R-103	8,5

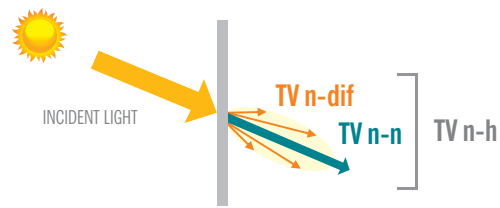

OPTICAL FACTORS

TV n-h ($\tau_{v, n-h}$):
Normal-hemispheric light transmittance in %





FABRIC CHARACTERISTICS	RECSCREEN RUSTIC	STANDARD
Composition	30% PES HT - 70% PVC	
Type of fabric	Fantasy polyester screen	
Yarn diameter	0,30 mm	
Openness factor	6%	UNE-EN 14500:2010
Colour range	4 colours	
Use	Indoor and Outdoor	

TECHNICAL FEATURES

Weight	530 g/m ² / 15,6 oz/yd ²	UNE-EN 12127:1998
Thickness	0,75 mm	UNE-EN ISO 5084:1997
Width	300 cm / 118"	
Standard roll length	25 m / 27.3 yards	
Tensile strength (warp/weft)	160/105 daN/5 cm	UNE-EN ISO 13934-1:2013
Tear strength (warp/weft)	11/12 daN	UNE-EN ISO 13937-2:2001
Colour fastness to artificial light - Xenotest	4-5 (Good - Excellent) Grey scale 7-8 (Very good - Excellent) Blue scale	UNE-EN ISO 105 B02:2014
Colour fastness to artificial weathering - Xenotest	4-5 (Good-Excellent) Grey scale	UNE-EN ISO 105 B04:1998
Antimicrobial activity	Up to 99,99% bacteria growth reduction No fungi growth, fungistatic fabric - Grade 0	AATCC Test Method 100-2012 UNE-EN ISO 846:1998
Fire classification	Class 1 B-s2,d0 (on substrate and with air chamber)	UNE-EN 13773:2003 UNE-EN 13501-1:2007+A1:2009


QUALITY MANAGEMENT SYSTEM

ISO 9001

ISO 9001:2015

SAFETY, HEALTH AND ENVIRONMENT

Odour test at temperature of (40 ± 2)°C	2 (Perceptible, not unpleasant)	PV-3900:2000-08
Odour test at temperature of (80 ± 2)°C	3 (Clearly perceptible, still not unpleasant)	




TEST LABORATORIES



ADVANTAGES AND BENEFITS



Textile look and feel




Dimensional stability



Rolling quality



No cone effect



No colour distortion



Printable fabrics



Easy to maintain



Energy saving



Cost saving



Stands the test of time



RECASENS

BCN 1886



HEADQUARTERS:

Travessera de Gràcia, 18-20. 08021 Barcelona - Spain
Phone +34 93 200 27 00 - Fax +34 93 202 19 32
export@recasens.com / cial@recasens.com
www.recasens.com