

CRISTALREC 0,50 FR & 0,65

RECASENS
BCN 1886

Características del tejido *Fabric characteristics*

Cristalrec 0,50 FR & Cristalrec 0,60

Composition	100% PVC		
Type of fabric	Acabado transparente impermeable y reversible Transparent waterproof finished and reversible		
Finish	Acabado liso brillante Smooth gloss finish		
Use	Interior y exterior Indoor and outdoor		

Características técnicas *Technical characteristics*

0,50 FR

0,65

Peso Weight	620 g/m ² / 18.29 oz/yd ²	830 g/m ² / 24.48 oz/yd ²	UNE-EN ISO 2286-2
Grosor Thickness	0,50 mm	0,65 mm	UNE-EN ISO 2286-3
Ancho Width	150 cm / 59"	137 cm / 54"	
Longitud estándar del rollo Standard roll lenght	50 m / 54.6 yards	30 m / 32.8 yards	
Resistencia a la tracción (urdimbre/trama) Tensile strenght (warp/weft)	180 kg/cm ²		UNE-EN ISO 13934-1
Resistencia al desgarro (urdimbre/trama) Tear strenght (warp/weft)	6 kg/mm		UNE-EN ISO 4674-1
Resistencia al frío y al calor Resistance to cold and heat	-22°C/+66°C		
Encogimiento estático Static shrinkage	≤ 2,5% (23°C - 72 h)		Method T-206
Resistencia entre capas Interlayer resistance	≤ 4 kg/cm		Method T-210
Evaluación relativa a la apariencia contra el frío (-30°C) y el calor (+66°C) Evaluation standard concerning appearance against cold (-30°C) & heat (+66°C)	4-5 (Pass)		
Comportamiento en ambiente salino Performance in saline enviroment	Sin ampollamiento. Sin agrietamiento. Sin cambios. No blistering. No cracking. No change.		UNE-EN ISO 9227
Resistencia a agentes químicos diluidos en agua Resistance to chemical agents diluted in water	Limpiacristales, amoniaco, lejía, detergente quitagrasas. Sin alteraciones Window cleaning fluid, ammonia, bleach, grease removing. No change		UNE-EN ISO 2812-1
Fire classification	B2 - Pass		



RECASENS
BCN 1886




OFICINA CENTRAL / HEADQUARTERS
Travessera de Gràcia, 18-20 - 08021 Barcelona (Spain)
Tel./Phone: +34 932 002 700 - Fax: +34 932 021 932
info@recasens.com - www.recasens.com



The technical characteristics shown are average values with a +/-5% tolerance. The data indicated in this document are the result of laboratory tests or technical calculations in accordance with current regulations. As our products are constantly evolving, according to market demands and technical progress, S.A. RECASENS reserves the right to change these data at any time. It is the customer's responsibility to check that the data that they are consulting are from the most recent update. The customer shall be responsible for the correct use of the fabric with regard to the applications for which it has been designed and recommended. S.A. RECASENS accepts no responsibility regarding the assembly and installation of its products. It also accepts no responsibility for its products being installed in non-compliance with current regulations. The photographs and descriptions in this catalogue have no contractual value, they are indicated for guidance only. S.A. RECASENS reserves the right to make any modifications it deems appropriate. Copyright©2025 S.A. RECASENS. All rights reserved.


CRISTALREC

Cristalrec 0,50 FR

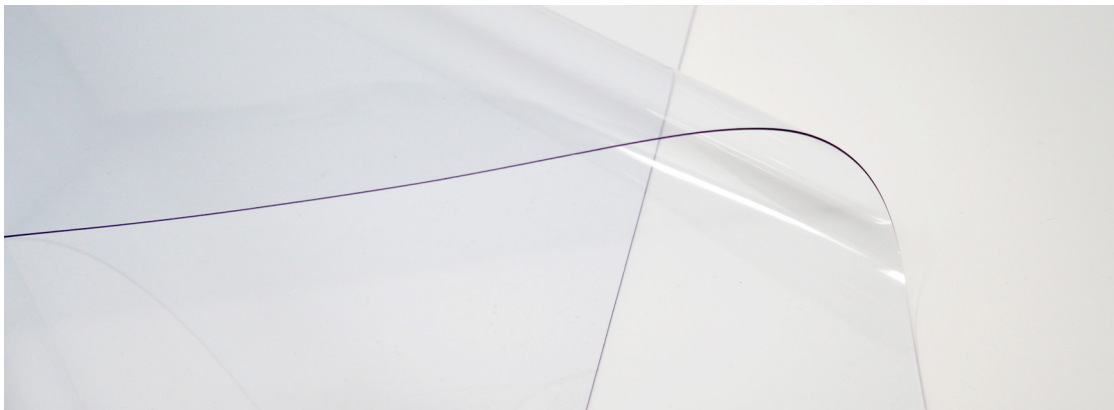

805 Cristalrec 0,50 mm FR

Cristalrec 0,65

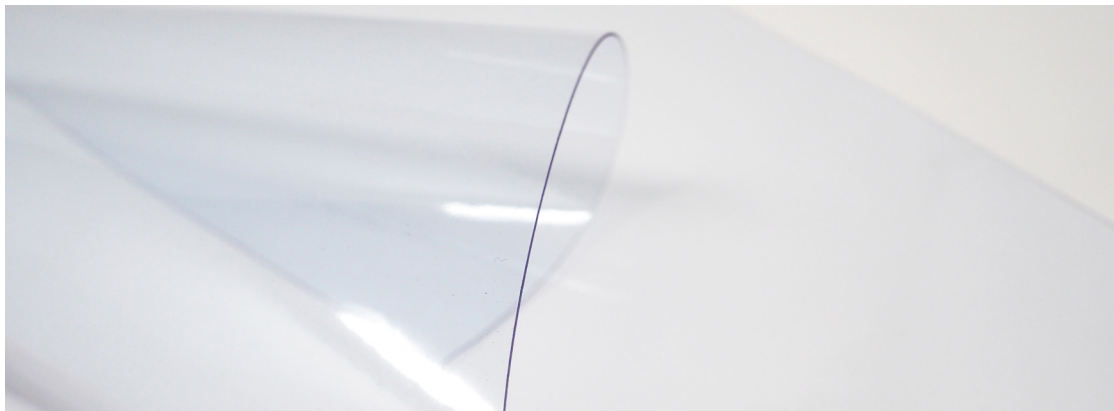

806 Cristalrec 0,65 mm

Cristalrec 0,50 FR & 0,65

Lámina de PVC transparente pulida con inhibidores de rayos UV, recomendada para cubrir ventanas de barcos, restaurantes, terrazas y carpas.

CRISTALREC es una lámina de PVC transparente, de 0,5 mm o 0,65 mm de espesor, con altos niveles de inhibidores de UV que evitan el amarilleamiento cuando se utiliza en aplicaciones exteriores. Su excepcional transparencia la hace ideal para aplicaciones en las que se requiere una visibilidad perfecta y una larga vida útil. Se añade al producto una fórmula fungicida especial para mantener la superficie libre de moho.

Clear polished PVC sheet with UV inhibitors recommended to cover boat windows, restaurants, terraces and tents.

CRISTALREC is a sheet of transparent PVC, 0.5mm or 0.65mm thick, with high levels of UV inhibitors that prevent yellowing when used in exterior applications. Its exceptional transparency makes it ideal for applications where perfect visibility and long life is required. A special fungicide formula is added to the product in order to maintain the surface mold free.

Aplicaciones | Applications




Flybridge enclosure

Propiedades | Properties

Cristalrec 0,50 FR



Water resistant




Resistance to tearing



Resistance to traction



Bacteria resistance



Mold & mildew resistance



Transparent



Flame retardant




Resistance to cold and to heat

Cristalrec 0,65



Water resistant




Resistance to tearing



Resistance to traction



Bacteria resistance



Mold & mildew resistance



Transparent

Ventajas y beneficios | Advantages and benefits



Suitable for marine environments



Easy to clean and maintain



Protection from UV rays